



DOWNLIGHT - VALO



XQ1003-7W
Power : 7W / 12W / 20W / 30W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux



XQ1003-12W
Power : 12W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux



XQ1003-20W
Power : 20W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux



XQ1003-30W
Power : 30W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux

Reflector Color :





Sand gold White Chrome Silver Pearl Black Black



XQ1003S-7W
Power : 7W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux




XQ1003S-12W
Power : 12W
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux

Body Color :

- White
- Black

Driver Options :


- Non-DIM
- TRIAC
- 0/1-10V
- DALI





XQ1003S-7WL2
Power : 7Wx2
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux



XQ1003-7WL2
Power : 7Wx2
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux



XQ1003-7WL3
Power : 7Wx3
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux




XQ1003-7WL4
Power : 7Wx4
Beam angle : 15° / 24° / 36° / 55°
Color temperature : 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K
2700K - 6000K (Tunable White)
Color rendering index : ≥90
Light efficiency : 80lm/W
Operating temperature : 25-50°C
Rated life hours : 35000H
LED chip : Bridgelux

Accessories :




Honey comb Soft Lens Square Stripe

DOWNLIGHT - VALO X

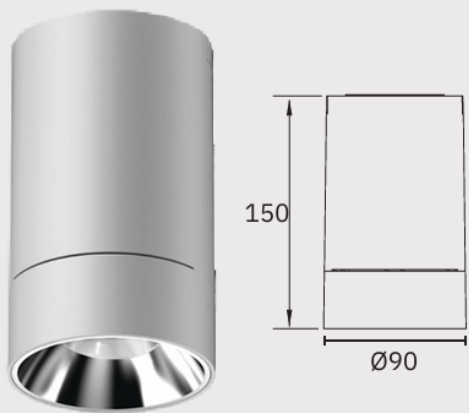

MZ7001R-ZZ-TJ

Power	: 7W / 12W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

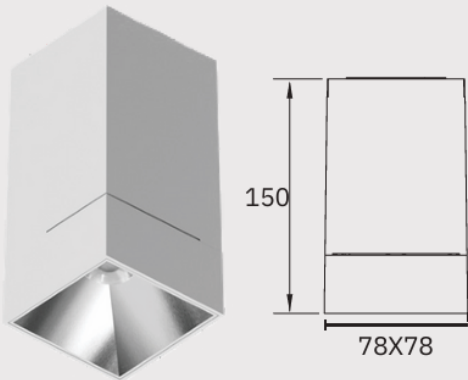

MZ7001S-ZZ-TJ

Power	: 7W / 12W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

Reflector Color :



Body Color :

- White
- Black










Driver Options :

- Non-DIM
- TRIAC
- 0/1-10V
- DALI


Accessories :




DOWNLIGHT - VALO MR16 HOUSING SERIES

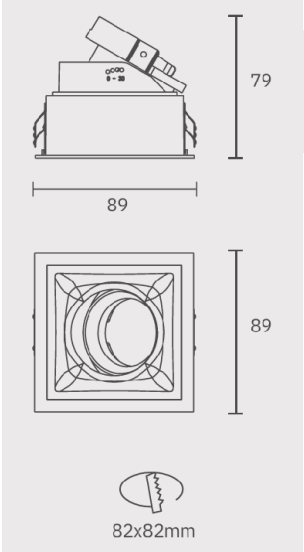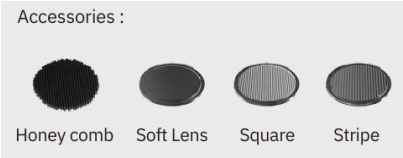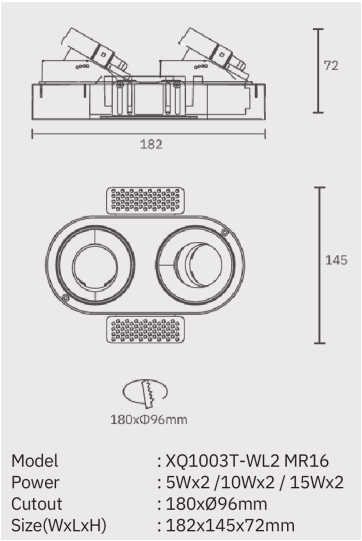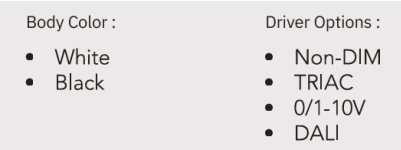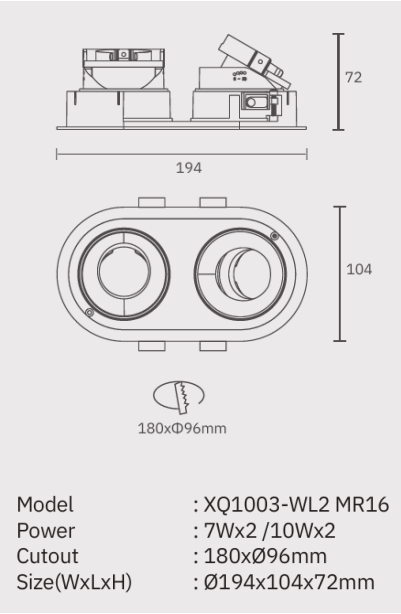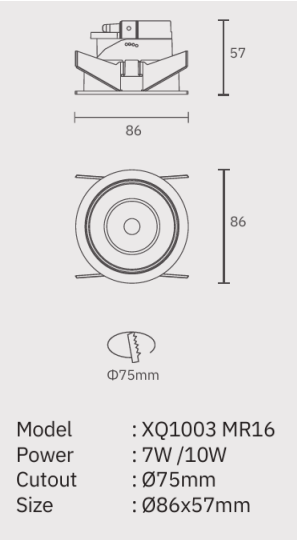


DOWNLIGHT - VALO MR16 SERIES




Model : VMR1603M
Power : 3W
Size(WxLxH) : Ø50x60mm



Model : VMR1607M
Power : 7W
Size(WxLxH) : Ø50x70mm



Model : VMR1605M
Power : 5W
Size(WxLxH) : Ø50x60mm






Model : VMR1610M
Power : 10W
Size(WxLxH) : Ø50x90mm

Driver Options :

- Non-DIM
- TRIAC
- 0/1-10V
- DALI

SPOTLIGHT - VALO TELESCOPIC ADJUSTABLE

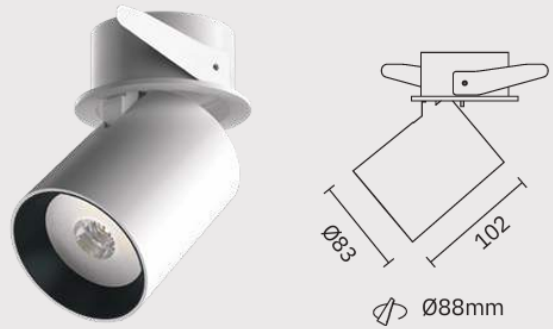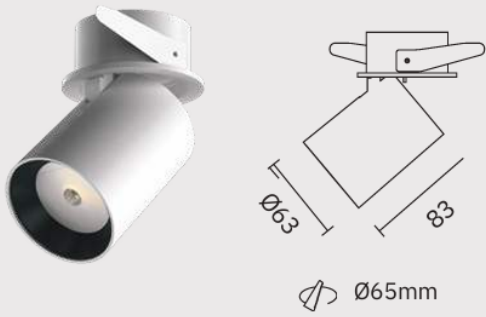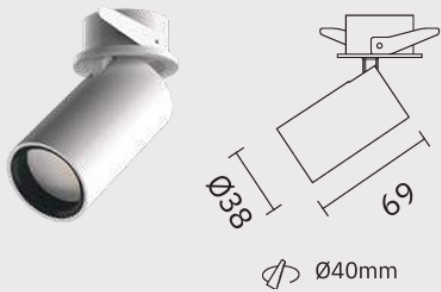

LS3001R45

Power	: 6W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

LS3001R65

Power	: 12W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux


LS3001R85

Power	: 25W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux




LS3005E70

Power	: 6W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

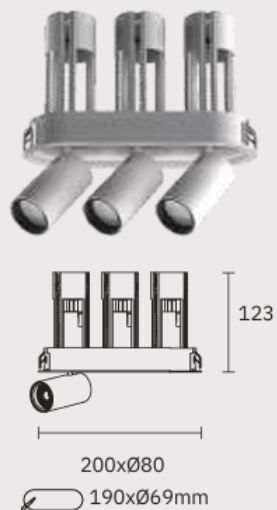


LS3005E70-3

Power	: 6Wx3
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

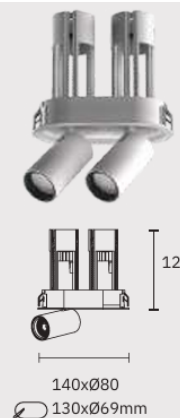


LS3005E70-2

Power	: 6Wx2
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

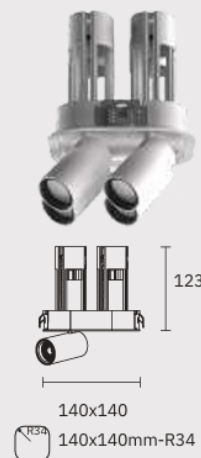

LS3005E70-4

Power	: 6Wx4
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux




LS3003R45

Power	: 6W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux



LS3003R65

Power	: 12W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

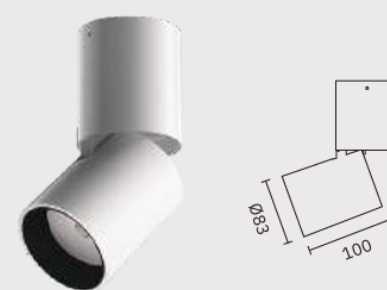

LS3003R85

Power	: 25W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 3500K / 4000K / 4500K / 5000K / 6000K 2700K - 6000K (Tunable White)
Color rendering index	: ≥90
Light efficiency	: 80lm/W
Operating temperature	: 25-50°C
Rated life hours	: 35000H
LED chip	: Bridgelux

Reflector Color :



White+White



White+Black



Black+Gold



Black+Black

Body Color :

- White
- Black

Driver Options :

- Non-DIM
- TRIAC
- 0/1-10V
- DALI

Accessories :



Honey comb



Soft Lens





Square



Stripe



SPOTLIGHT - VALO ADJUSTABLE



Ø40mm

FD-K40

Power : 5W
Beam angle : 15° / 24° / 38°
Color temperature : 2700K / 3000K / 4000K / 5000K
Color rendering index : ≥ 80 / ≥ 90
Light efficiency : 425lm/W
Operating temperature : 25-50°C
Rated life hours : 50000H
LED chip : Bridgelux



Ø50mm

FD-K50

Power : 8W
Beam angle : 15° / 24° / 38°
Color temperature : 2700K / 3000K / 4000K / 5000K
Color rendering index : ≥ 80 / ≥ 90
Light efficiency : 680lm/W
Operating temperature : 25-50°C
Rated life hours : 50000H
LED chip : Bridgelux

Reflector Color :



Sand gold

White

Chrome

Silver

Pearl Black

Black

Driver Options :


- Non-DIM
- TRIAC
- 0/1-10V
- DALI

Optional :




Soft Lens Square Stripe

SPOTLIGHT - VALO X



FD-B30

Power	: 3W
Beam angle	: 15° / 24° / 38°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80/≥90
Light efficiency	: 255lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux



FD-B40

Power	: 5W
Beam angle	: 15° / 24° / 38°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 425lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux



FD-B50

Power	: 8W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 680lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux

Reflector Color :



White+White



White+Black



Black+Gold



Black+Black

Body Color :

- White
- Black

Driver Options :

- Non-DIM
- TRIAC
- 0/1-10V
- DALI

Accessories :



Honey comb



Soft Lens




Square



Stripe

SPOTLIGHT - VALO ANTIGLARE



Ø55mm

PE-G55

Power	: 5W
Beam angle	: 15° / 24° / 38°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 425lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux



Ø65mm

PE-G65


Power	: 7W
Beam angle	: 15° / 24° / 36°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 595lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux



Ø75mm

PE-G75

Power	: 9W
Beam angle	: 15° / 24° / 38°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 765lm/W
Operating temperature	: 25-50°C
Rated life hours	: 50000H
LED chip	: Bridgelux




Ø95mm

PE-G95

Power	: 15W
Beam angle	: 15° / 24° / 38°
Color temperature	: 2700K / 3000K / 4000K / 5000K
Color rendering index	: ≥80 / ≥90
Light efficiency	: 1275lm/W
Operating temperature	: 25-50°C
Rated life hours	: 5-000H
LED chip	: Bridgelux

Reflector Color :



Body Color :

- White
- Black

Driver Options :

- Non-DIM
- TRIAC
- 0/1-10V
- DALI

Accessories :

